

Your reliable
partner in
Temperature
Control Units




TEMP 300XL

Temperature control unit for Thermal oil up to 300 °C

- ❖ High isolation against heat loss
- ❖ Easy operation
- ❖ Pressure less operation
- ❖ Low noise



| Equipment: | Standard | Optional |
|---------------------------------------|----------|----------|
| Automatic restart | • | |
| Temperature deviation alarm | • | |
| Automatic water refilling | • | |
| Vacuum during operation | | • |
| Mould draining | | • |
| Automatic cool down function | • | |
| Connection for external PT 100 sensor | | • |
| Service indicator (hour counter) | • | |
| Serial interface 20 mA CL | | • |
| Analog interface 4-20 mA | | • |
| Profibus | | • |
| Ethernet/IP | | • |
| Profinet | | • |

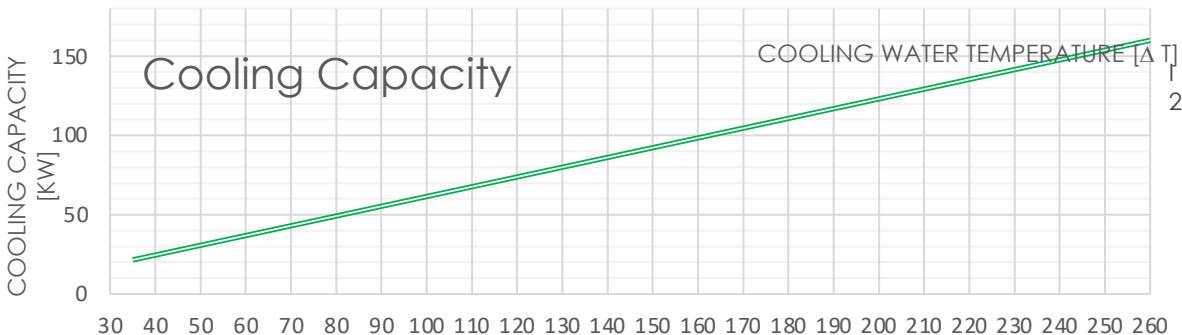

Technical Specifications:

| | | |
|-------------------------------------|---------------------------|--------|
| Max outlet temperature | 300 °C (Optional 350 °C) | |
| Heating capacity | 72 kW (opt. 96kW) | |
| Heat transfer fluid | Thermal oil | |
| Filling quantity L | 29 | |
| Expansion volume L | 24 | |
| Pump | Magnetic driven | |
| Type | CY6/15 | CY6/20 |
| Flow rate max. l/min | 150 | 190 |
| Pressure max. Bar | 8,8 | 8,8 |
| Power kW | 3 | 4 |
| Cooling cap. at $\Delta T = 260 °C$ | | |
| Type | I2 | |
| kW | 160 | |
| Connections in/out | Process 1" - Cooling 1/2" | |
| Dimensions (L x W x H) mm | 1353 x 490 x 1500 | |
| Weight | 225 kg | |